


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	RELEASE	OCT.31.2018	ANDY
B			

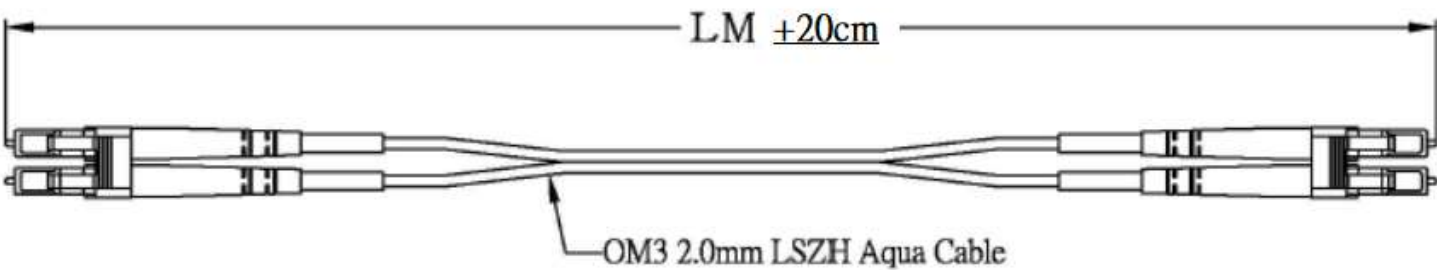

Feature:

1. MM LC/PC & LC/PC connector.
2. Multi mode OM3 optical fibre cable 2.0mm outside diameter.
3. Insertion loss : 0.3dB Max.
4. Pull out strength : 90N.
5. Increase in insertion loss after 500 matings : 0.2dB Max.
6. Temperature ranges and humidity :
 - Storage temperature -40 -- 80°C
 - Operating temperature -20 -- 70°C
 - Humidity (non - condensing) 95% RH

TOLERANCES 0.±0.2
0.0±0.1
ANGLE ± 1/2 0.00±0.05

					DRAFT	Ann	DWGNAME OM3 LC-LC 2.0mm LM							
1		1			CHECKED		DWG NO.			REV. A				
NO.	part name	QTY.	material	Performance	APPROVED		SCALE	N/A	UNIT	mm	SIZE	A4	SHEET	1 OF 1